
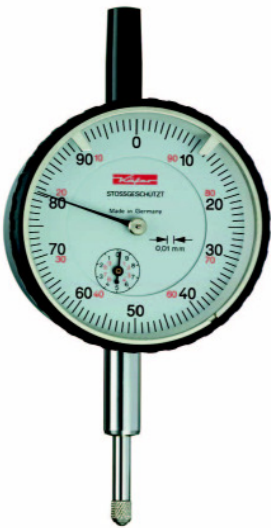
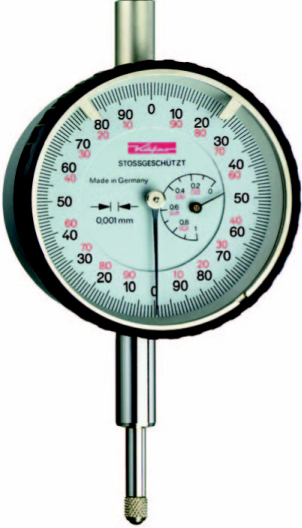



Dial gauges



Mechanical dial indicator

Order-no.	specification	Price in €
	<p>dial gauge DIN 878 new production technologies, protected by a patent allows to market these gauges at an astonishing low price. Effective impact protection protects the Dial Gauge M 2 TOP ,S' even from hard impacts on the spindle, thereby reducing the risk of damage to the teeth. Spindle and stem are made of resistant stainless steel.</p> <p>stern Ø: 8 h 6</p>	
KF-M2-TOP-S	Measuring range 10 mm, resolution 0,01 mm range per revolution: 1 mm, bezel-Ø: 58 mm	33,50
KF-KM4-TOP-S	Measuring range 3 mm, resolution 0,01 mm range per revolution: 0,5 mm, bezel:Ø 40 mm	40,00
KF-KM4/5-TOP-S	Measuring range 5 mm, resolution 0,01 mm range per revolution: 0,5 mm, bezel:Ø 40 mm	51,50
	<p>dial gauge DIN 878 As additional feature this Dial Gauge offers fine adjustment of the pointer. By simply moving the knurled screw at the top of the Dial Gauge the large hand can be set to the required position and without turning the bezel and the outer dial the Dial Gauge can be easily zeroed.</p> <p>Choc protected Stern-Ø: 8h 6</p>	
KF-M2S	Measuring range 10 mm, resolution 0,01 mm Range per revolution: 1 mm, bezel-Ø: 58 mm	63,00
KF-M2/30S	Measuring range 30 mm, resolution 0,01 mm Range per revolution: 1 mm, bezel-Ø: 58 mm	78,00
KF-M2/50S	Measuring range 50 mm, resolution 0,01 mm Range per revolution: 1 mm, bezel-Ø: 58 mm	102,00
KF-M2/80S	Measuring range 80 mm, resolution 0,01 mm Range per revolution: 1 mm, bezel-Ø: 58 mm	209,00

High precision mechanical dial gauges

Order-no..	specification	Price in €
	<p>Dial gauge de précision High Precision Dial Gauges are high-resolution gauges with 0,001 mm or 0,002 mm graduations and 0,1 mm or 0,2 mm measuring distance per pointer revolution. The high magnification gear train and high-resolution dials allow a very precise reading of the measured value.</p> <p>The well thought-out design as well as the extremely precise, while robust in operation, execution of our High Precision Dial Gauges with precision gear movement guarantee for their reliability and long service life. The following quality features apply to our entire manufacturing programme</p> <ul style="list-style-type: none"> - Highly responsive movements. - Precisely matched measuring spindles and stems to minimise lateral play. - All gear pivots run in high-class ceramic bearings. - A threaded protection sleeve to prevent ingress of contaminants. - All shockproof models contain an effective impact protection sleeve. 	
KF-FM1000S	Measuring range 1 mm, resolution 0,001 mm Range per revolution: 0,2 mm, bezel:Ø 58 mm	86,00
KF-FM1000/5S	Measuring range 5 mm, resolution 0,001 mm Range per revolution: 0,2 mm, bezel:Ø 58 mm	101,00
KF-FM1000/12TK	Measuring range 12 mm, resolution 0,001 mm Range per revolution: 0,2 mm, bezel:Ø 58 mm	112,00
	<p>High precision mechanical dial gauge Choc protection DIN 879-1</p> <p>A safety cap prevents unintentional turning of the fine adjustment facility. Stem and spindle are made of hardened stainless steel. The red tolerance markers are easy to recognize and to set.</p> <p>The measuring pressure is approximately 1 N. On request all models are available with a pressure of 0,5 N. Insert made of ruby Measuring force approx 1,0 N. Stern-Ø: 8 h 6</p>	
KF-COMPIKA 101	Measuring range 0,5 mm, resolution 0,01 mm reading: 25-0-25, external diameter : Ø 62 mm	111,50
KF-COMPIKA 1001	Measuring range 0,1 mm, resolution 0,001 mm reading: 50-0-50, external diameter: Ø 62 mm	137,00

Dial gauges digitales

Order-no.	specification	Price in €
KF-MD 12 T 	Digital dial gauge - LCD display with digits 8,5 mm high - resolution 0,01 mm - measuring range 12,5 mm - maximum error 20 µm - interface opto RS232 functions: zero setting (INC) /Hold conversion mm/inch selection of measuring direction data request by any ASCII code	210,00
KF-MD 25 T	Like above with measuring range 25 mm	236,00
KF-MD 50 T	Like above with measuring range 50 mm	498,00
KF-MD 100 T	Like above with measuring range 100 mm	549,00
KF-FMD 12 T 	High precision digital dial gauge µ-resolution - LCD display with digits 8,5 mm high - resolution 0,001 mm - measuring range 12,5 mm - interface opto RS232 functions: zero setting (INC) /Hold conversion mm/inch selection of measuring direction data request by any ASCII code	256,00
KF-FMD 25 T	Like above with measuring range 25 mm	277,00
KF-FMD 50 T	Like above with measuring range 50 mm	545,00
KF-FMD 100 T	Like above with measuring range 100 mm	599,00